

()

INTERSTATE COUNCIL FOR STANDARDIZATION, METROLOGY AND CERTIFICATION
(ISC)

IEC
61676-2011

(IEC 61676:2002, IDT)



2013

1.0—92 «
1.2—2009 «

1
«
» ()
2
()
3
(Ns 40-2011 29 2011 .)
:

(3166) 004—97	(3166) 004— 97	
	BY KZ KG RU TJ UZ	

4
13 2011 .Vs 1351- IEC 61676- 2011
1 2013 .

5 IEC 61676:2002 Medical
electrical equipment - Dosimetric instruments used for non-invasive measurement of X-ray tube
voltage in diagnostic radiology ()
,

).

(IDT).

61676- 2006

6

()
« ».

« »,
« ».

« »

© , 2013

,

1	1
2	2
3	3
4	9
4.1	9
4.2	10
4.3	15
4.4	19
5	35
5.1	35
5.2	35
5.3	36
5.4	36
5.5	36
6	36
6.1	36
6.2	37
6.3	37
6.4	37
6.5	37
6.6	37
6.7	37
6.8	38
()	39
()	40
()	48
. .()	50

IEC 61676:2002 «

».

,

« »,

« » («Practical Peak Voltage»).

« »

(GENERATORS),

,
(RADIOGRAMS)

« »

« »

«

»

$\pm 5 \%$;

Medical electrical equipment. Dosimetric instruments used
for non-invasive measurement of X-ray tube voltage in
diagnostic radiology * 1

- 2013-01-01

1

150

(),

IEC 61010-1.

2

- :
 IEC 60417 () Graphical symbols for use on equipment
 (,)
 IEC 60788:1984 Medical radiology - Terminology ()
 .
 IEC 61000-4-2:1995 Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 2: Electrostatic discharge immunity test (). 4:
 .
 IEC 61000-4-3:2000^{1>} Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 3: Radiated, radio-frequency, electromagnetic field immunity test (). 4-3:
 .
 , ,)
 IEC 61000-4-4:1995^{2*} Electromagnetic compatibility (EMC) - Part 4: Testing and measuring techniques - Section 4: Electrical fast transient/burst immunity test (). 4-4:
 .
)
 IEC 61000-4-5:1995^{3>} Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 5: Surge immunity test (). 4-5:
 .
)
 IEC 61000-4-6:1996⁴⁾ Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 6: Immunity to conducted disturbances, induced by radio-frequency fields (). 4-6:
 .
)

- !> IEC 61000-4-3:2006.
- 2> IEC 61000-4-4:2006.
- > IEC 61000-4-5:2006.
- > IEC 61000-4-6:2006.

IEC 61000-4-11:1994ⁿ Electromagnetic compatibility (EMC) - Part 4:
Testing and measuring techniques - Section 11: Voltage dips, short interruptions
and voltage variations immunity tests (

(). 4-11:

)

IEC 61010-1:2001 Safety requirements for electrical equipment for
measurement, control, and laboratory use. Part 1. General requirements
(

1:

)

IEC 61187:1993 Electrical and electronic measuring equipment;
documentation (

-)

ISO:1993 International vocabulary of basic and general terms in metrology
[(ISBN
92-67-01075-1)]

ISO 7000:1989^{* 2)} Graphical symbols for use on equipment; index and
synopsis (

)

3

, ,
IEC 60788 ISO «
»,
ISO.

◦ IEC 61000-4-11:2004.
2) ISO 7000:2004

3.1

,
,

3.2

,
,

3.3

,
,

3.4

:
,

(
.)
,

(
),
,

3.5

: ,

3.6

(. .)

,

3.7

:

3.8

,

$\pm L \%$ / ,
 L

L

3.9

:

().

3.10

:

().

3.11

12

3.13

3.14

).

3.15

$L_{max}e$

-----^{“Λ”}
----- 100%,

$U_m ax$ -

;

Umm -

3.16

- (PPV):

0 ,

$$jp(u)u\{u\}-UdU$$

$$u = \frac{- \cdots \cdots '] \{) }{\| p(U) \}_W \{ U \} dU} V''.$$

.,

$p(U)$ - |/;

$w\{U\}$ - ;

U_{max} - ;

U_{min} - .

$$\begin{array}{lll} , & w(U) & p(U) \\ . & & 8 \\ & & w(U), \end{array}$$

,

,

3.17

:

,

,

,

,

,

,

,

,

,

,

3.18

: ,

3.19

:
(),
· · (),

3.20

:

3.21

:

3.22

:

3.23

:

3.24

: /

,
()
, ()
)
().

3.25

4

4.1

1.

1 -

(20 - 50))	24 35
	W	60 120
(80-150)	W	100 140
(40-110)	W	60 90
(40- 130)	W	60 120
10		

4.2**4.2.1****4.2.2****4.2.2.1**

50

/,

 $U,$

(. . 3.22),

 $\pm 2 \%$ | ~ • ».\$002.
* ; $O^{\text{TM}}_{\infty} -$

;

(® -

1.

4.2.2.1**4.2.2.2.****4.2.2.2**

50

± 1

$$| \Delta | = |U_{meas} - U_{true}| < 10 \text{ mV}$$

O_{meas}

;

-

-

-

-

-

1.

4.2.2.1 4.2.2.2

50

50

,

1.

2

2

5

100

10

100

,
40 80 ,
- 60 120 ,
60
80 .
, 60; 65; 70; 75 80

4.2.3

(. 4.2.2).

40 80 , - 60 120 ,

40 80
 , 60 120
 (
).

2.

4.2.4

,
0,5

$\pm 0,5 \%$,

2

,
40 80 , - 60 120 ,
60 80

4.2.5

,
, $\pm 2\%$
50 $\pm 1,0$ - 50
,

,

(
)
50

50 , ,

40 80 , - 60
120 , 60 80

4.3

4.3.1

,
- 2.

4.3.2

- 2.

4.3.3

2.
,

4.3.4

2

4.3.5

 $\pm L$

2.

,

$$| < / *) - 1 | \quad 0 \% < L.$$

2 -

,

 $\pm L$

,

		-	-	\pm .	$\pm L$ %	,	-
• :	() - 12- •	, 2-, 6-, ▲ -	,	-	2,0 4 % 0,5	— — —	4.4.2
• :	6° - 15° •	18° 12° 20°	$\pm 2^\circ$	— 0,5 —	0,5 —	— —	4.4.3

		-	-	\pm .	$\pm L.$ %	-
- : •	2,5 3,5 ! >	3,0 AI	$\pm 5\%$	0,5	1,5	4.4.4
	25 35	30			-	
	4 8 AI	6 1			1,5	
	1 2 AI	1,5 1			1,5	
- / : • - - -	20 200	-	$\pm 20\%$	0,5	0.5	4.4.5
	25 150	-				
	20 200	-				
	5 50	-				
	1 10	-				
, : - -	10 1000	100	$\pm 20\%$	0.5	4.4.6	
	20 1000	500				
: : •	$+30\% ; -10\%$		$\pm 2\%$	0.5	4.4.7.1	
	30 * 30	30 30				
—	32 60	40	1 %	0.5	4.4.8	
	$\pm 5^\circ$	0°	$\pm 1 \%$	0.5	4.4.9	

2

		-	-	$\pm \varepsilon$	$\pm L$ %	-
	$\pm 180^\circ$	0°	$\pm 1\%$	-	0,5	4.4.10
	$15^\circ \quad 35^\circ$	20°	$\pm 2^\circ$	-	1,0	4.4.11
	s 80 % (max 20 /)	50%	30% 75%			
:	115 230 +10%;-15% 50 60	115/230 50/60	$\pm 1\%$	-	0,5	4.4.12.1 4.4.12.2 4.4.12.3
	IEC 61000-4- (2 6, 11)		-	-	1.0	4.4.13
10 log 0. . , 0 % 20 %	{- 50 50 , , 0	1000 , , 0	% 3 %	(%) 0 50	(50- .	
50						
>						
>						
,	30	.	,			

4.4

4.4.1

五

,

3.

1

5

(

)₁

2,

0,5 %.

(

)

5

Электротехническая библиотека Fleg.ru

40 90 ,
 - 60 120 ,
 60 90 .
 60 80
 60; 75 90

3-

		,
	24; 28; 30, 35	30
	60; 80, 100, 120	80
	100; 120; 140	120
	60; 75; 90	60
	60; 80; 100; 120	80

4.4.2

50 50 .

(%)- 0 (50 - 10 log /),

f - , .

2.

, ,

,

,

:

) - 8 10

;

) 0,5 1

20 % 25 %;

c) 5 15

8 % 15 %;

;

d) 4 %.

) - d)

,

,

3

, 2 (,

),

,

4.4.3

2.

2.

4.4.4

2.

2.

,

3

4.4.1

,

4.4.5

2.

2.

,

,

,

,

,

-

,

,

/

,

,

-

,

(

),

4.4.6

2.

2.

,

,

()

,

3

,

4.4.7

2.

4.4.7.1

,

2.

4.4.7.2

30*30

2.

30*30

4.4.8

8

2.

2.

3

4.4.9

2.

2.

3

4.4.10

4.4.10.1

$\pm 10^\circ$

2.

,
 10° ,

,
 10°

,
3

4.4.10.2

,
 180° ,

,
2.

,
 45° ,

,
 90° , 135° 180°

,
,

,
 (0°)

,
3

4.4.11

,
2

,	,	,	,
,	,	,	,
,	,	,	,
,	,	,	,

, ° , %

20	50
15	80
35	50

24

3,

4.4.12

4.4.12.1

2

,

2

4.4.12.2

2.

3,

«

».

3,

4.4.12.3

(,
)

2

, ;

, ;

,

,

,

,

,

,

,

,

,

,

,

«

»,

3,

4.4.13

4.4.13.1

(,
) ,

, 2.

,
(. IEC 61000-4-2)

,
(,
).

150 ,

6 , 330 (
3 IEC

61000-4-2).

,
8 (3).

, 3,

4.4.13.2

)

(

2.

3 /

80 1 , 1 % (

2 no IEC 61000-4-3).

6.8.3 6.8.4

27

27; 80; 90;

100; 110; 120; 130; 140; 150; 160; 180; 200; 220; 240; 260; 290; 320; 350;
380; 420; 460; 510; 560; 620; 680; 750; 820; 900 1000

10 /

2

1 %

3

/ IEC 61000-4-3.

3,

4.4.13.3

2.

(. IEC 61000-4-4),
(. IEC 61000-4-6).

3

IEC 61000-4-4 IEC 61000-4-6.

3,

4.4.13.4

,
(,
) ,

,

,
2.

-

,

,

IEC

61000-4-11.

,
3,

,

,

4.4.13.5

(,
) ,

,
2.

()
,
(. IEC 61000-4-5).
3 IEC
61000-4-5.

5

5.1

IEC 61010-1.

5.2

IEC 60417 ISO 7000.

- ();

- ();

- , «

».

,

.

5.3

, ,

,

,

, 0,5 %.

5.4

4.2.2

,

5.5

,

6

6.1

IEC 61187.

6.2

,

,

6.3

,

,

6.4

,

,

6.5

,

,

6.6

,

6.7

6.8

20 ° 50 °

()

.1

,
,

,

,

,

.2

.1

	2150
	280
	280
	210000:1
	±1%
	>100
	±1 0 100
	± 0.5 %.

()

.1

1

»

,

,

,

,

,

,

2

,

3

,

,

(

«

»

10

(

) 1

AI).

,

.2

0

$p\{U,\)$

$[U_iAU/2, U_i+AUf2)$

0

$XI;(\{I,\) π -U,$

$$= \sum_{t=1}^{\pi} p(U_t) \cdot w(U_t) \quad (.1)$$

U_i , $w(U,)$

:

$1/,<20$:

$$w(U,) = 0; \quad (.2)$$

$20 < >< 36$:

$$w\{Uj\} = \exp \{ -a \cdot U? + b \cdot U_t + c \}_f \quad (. .)$$

$$= -8.646855 \cdot 03;$$

$$b = +8.170361 \cdot 01;$$

$$= -2.327793 \cdot 01$$

$35 < U^* \leq 150$:

$$w(UJ = d \cdot Uf + e \cdot Uf + f \cdot U? + g \cdotUi + h, \quad (BA)$$

$$d = +4.310644E-10;$$

$$e = -1.662009E-07;$$

$$f = +2.308190E-05;$$

$$g = + 1,030820E-0,5;$$

$$/? = - 1,747153E-0,2.$$

no 3.16

0

, , , .

- h .2 -

.4

«

» , « » , «

» , « » .

$$Ui < 50$$

$$w(U_i) = \exp \{ \bullet Uf + / \bullet U^3 + \bullet U? + \bullet U; + \}, \quad (.5)$$

$$= - 2,142352 - 06;$$

$$/ = + 2,566291 - 04;$$

$$= - 1,968138 - 02;$$


$$= + 8,506836 - 01;$$

$$= - 1,514362 + 01.$$


50 .

.1 .2

()

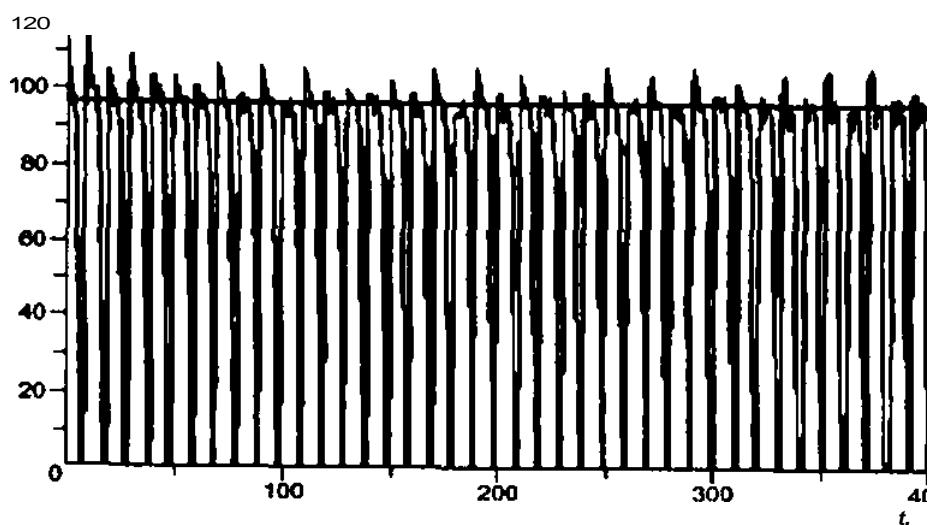


.1 -

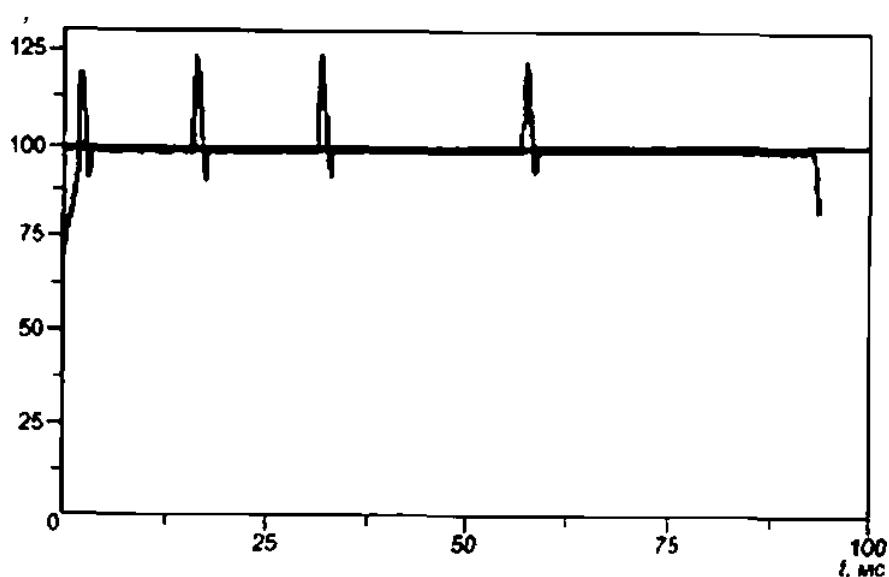

.2 -

U

20 ,
20 .1.

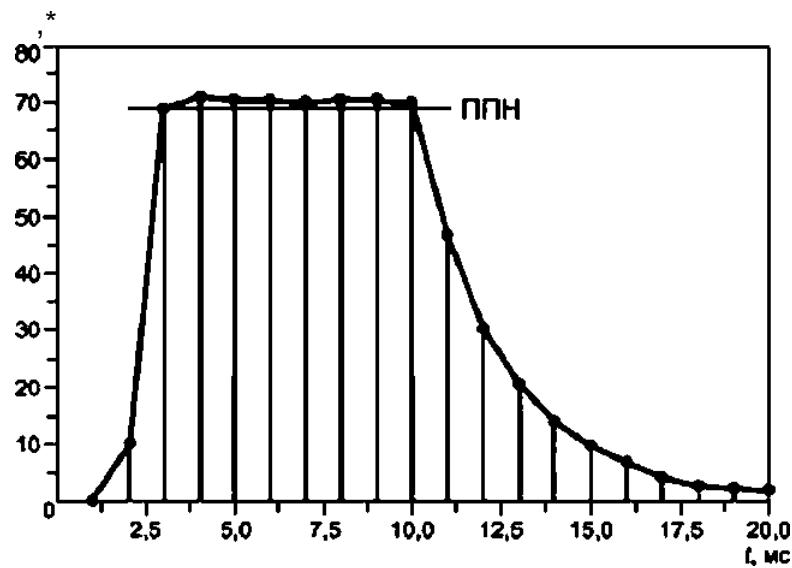

.1- 20 (. .)

1	$U_{..}$	1	$U_{..}$
1	0.00	11	46.60
2	10.00	12	30.10
3	68.60	13	20.80
4	70.60	14	13.90
5	70.20	15	9.80
6	70.20	16	6.80
7	69.90	17	4.20
8	70.20	18	2.60
9	70.00	19	2.10
10	69.90	20	1.50

, .1,
 $U < AU/2 \quad U, + AUf2 \quad AU = 0,1$
 $p\{U\}$,
2 3 .2.
4, $w\{U\}$,
(- $wiUtyU'UpiU,) - w(U,).$
6 7
(. . . 6).

.2 -

20

,	$UrAU/2,$ + 1//2,	($w(U,)$	(- $w(U,)^* U,$)	()- $wiU,)$
1	2	3	4	5	6	7
<20	<20,05	9	(.2)	0,0000 +00	0, 000 +00	. +
20,80	20,75-20,85	1	(.)	4.4299 -05	9.2141 -04	4.4299 -05
30,10	30,05-30,15	1	(.)	1.4747 -03	4,4389 -02	1,4747 -03
46,60	46,55-46,65	1	(.4)	1.8347 -02	8.5495 -01	1.8347 -02
68,60	68,55-68,65	1	(.4)	4.7750 -02	3,2757 +00	4J750E-02
69,90	69,85-69,95	2	(.4)	4.9555 -02	6.9278 +00	9.9110 -02
70,00	69,95-70,05	1	(.4)	4.9694 -02	3.4786 +00	4.9694 -02
70,20	70,15-70,25	3	(.4)	4.9972 -02	1.0524 +01	1.4992 -01
70,60	70,55-70,65	1	(.4)	5.0529 -02	3.5673 +00	5.0529 -02
		1=20			$\Sigma=2.8674 +01$	$\Sigma=4,1686 -01$

$$O = \frac{28,6741}{0,41686} = 68,78 \quad . \quad (.6)$$

,

,

$$[\quad (.1) \quad]$$

$$\hat{U} = \frac{\sum_{t=1}^n w(U_t) \cdot U_t}{\sum_{t=1}^n w(U_t)} \quad , \quad (.7)$$

$$O = \frac{28,674}{0,41687} = 68,78 \quad . \quad (.8)$$

/	U_k			$p(U,y w(U.))$
1	0,00	(.2)	. +	. +
2	10,00	(.2)	. +	0, 000 +00
3	68.60	(.4)	4.7750 -02	3.2757 +00
4	70.60	(.4)	5.0529 -02	3.5673 +00
5	70.20	(.4)	4.9972 -02	3.5081 +00
6	70.22	(.4)	5.0000 -02	3.5110 +00
7	69,90	(.4)	4,9555 -02	3,4639 +00
8	70,18	(.4)	4.9945 -02	3,5051 +00
9	70,00	(.4)	4,9694 -02	3,4786 +00
10	69,90	(.4)	4.9555 -02	3.4639 +00
11	46,60	(.4)	1.8347 -02	8.5495 -01
12	30,10	(.)	1.4747 -03	4.4389 -02
13	20.80	(.)	4.4299 -05	9.2141 -04
14	13.90	(.2)	0.0000 +00	. +
15	9,80	(.2)	0.0000 +00	. +
16	6,80	(.2)	0,0000 +00	. +
17	4,20	(.2)	. +	. +
18	2,60	(.2)	. +	. +
19	2,10	(.2)	. +	. +
20	1,50	(.2)	. +	. +
			-4.1686 -01	$\Sigma=2.8674 +01$

()

.1

	no IEC 61676	, IEC 61676
3.1		3.11, 3.19, 4.4.5 (4), .2
3.2		4.2.2.1 (3), 4.2.2.2 (2), 4.2.3, 4.2.4 (2), 4.2.5
3.3		3.1, 3.2, 3.6, 3.11, 3.12, 3.21, 5.1.2
3.4		3.17 (2), 3.19 (3), 3.23 (2), 3.24, 4.3.3, 4.3.4, 4.3.5 (2), 2(2), 4.4.1(2)
3.5		3.17 (2), 3.18, 3.19 (3), 3.22, 3.23 (3), 3.24 (2)
3.6		3.20, 4.2.2.2 (4), 4.2.5, 2
3.7		(2)
3.8		, 3.17 (2), 4.3, 4.3.5 (2), 2, 4.4.2, 4.4.3, 4.4.4, 4.4.5, 4.4.6, 4.4.7.1, 4.4.7.2, 4.4.8, 4.4.9, 4.4.10.1, 4.4.10.2, 4.4.11
3.9		.2
3.10		3.10
3.11		3.6, 4.2.2.1, 4.2.2.2, 4.4.5
3.12		4.1.1 (2), 1, 1, 4.2.2.1, 4.2.2.2
3.13		, , 1, 3.4
3.14		3.8, 3.24, 4.2* 4.2.1
3.15		3.8, 3.24, 4.2, 4.2.1, 3.15, 2 1, 4.4.2 (2)
3.16		4.1.1 (2), 4.2.2.1 (3), 4.2.2.2 (2), 4.2.3 (2), 3, 4.4.2, 6.1.4, .1, .1 (6), .2 (4), 2

C.J

	IEC 61676	, IEC 61676
3.17		4.2.3, 4.2.4, 4.3.2, 4.3.5, . 2 (4), 4.4.1, 4.4.2 (2), 4.4.3 (2), 4.4.4 (2), 4.4.5 (3), 4.4.6 (2), 4.4.7 (2), 4.4.7.1 (2), 4.4.8 (2), 4.4.9 (2), 4.4.11, 4.4.12 (2), 4.4.12.2 (3)
3.18		3.1, 3.6, 4.3.3 (2), 2 (2), 4.4.2, 4.4.6
3.19		3.1.8, 4.3.3, 2(18), 4.4.12.2
3.20		4.2.2.1 (2), 4.2.2.2, 4.2.5
3.21		, 3.1.4, 4.2.5 (2), 4.3.5, 4.4.2 (4), 4.4.3 (2), 4.4.4 (3). 4.4.5 (5), 4.4.6 (3), 4.4.7, 4.4.7.1 (2), 4.4.7.2 (3), 4.4.8 (2), 4.4.9 (3), 4.4.10, 4.4.10.1 (3), 4.4.10.2 (3), 4.4.11 (2), 4.4.12, 4.4.12.1, 4.4.12.2, 4.4.12.3, 4.4.13, 4.4.13.2, . 1, .2
3.22		3.6, 4.2.2.1, 4.2.2.2 (2), 4.2.3, 4.2.4 (2), 4.2.5, 4.3.4 (2), 2(2), 4.4.1, 4.4.5,
3.23		3.22, 3.24
3.24		, 2, 3.8, 3.17 (2), 4.4.5, 4.4.7.1, 4.4.12.1, 4.4.13.4 (3)
3.25		, (6), 3.4 (2), 3.7, 3.9, 3.10, 3.13, .1

()

A.1

IEC 60417 () ,			*
IEC 60788:1984			*
IEC 61000-4-2:1995 (). 4:	MOD		30804.4.2-2002
IEC 61000-4-3:2000 (). 4-3: ,			*
IEC 61000-4-4:1995 (). 4-4: -	MOD		30804.4.4-2002

1

IEC	61000-4-5:1995 (). 4-5:	MOD	30804.4.5-2002
IEC	61000-4-6:1996 (). 4-6:	MOD	30804.4.6-2002
IEC	61000-4-11:1994 (). 4-11:	MOD	30804.4.11-2002
IEC	61010-1:2001 1:		*

1

IEC 61187:1993		*
ISO: 1993		*
ISO 7000:1989		*
<p style="text-align: center;">— 8 —</p> <p style="text-align: center;">•MOD •</p>		

616.71-77-034:621.882.15:006.354

19.100

84 IDT