



**61951-1 —
2019**

,

1

-

(IEC 61951-1:2017, IDT)



2019

61951-1—2019

1 « » (-
»)
4 ,

2 044 « »

3 8 2019 . 896-

4 61951-1:2017 « -
1. - »

(IEC 61951-1:2017 «Secondary cells and batteries containing alkaline or other non-aod electrolytes — Secondary sealed cells and batteries for portable applications — Part 1: Nickel-cadmium». IDT).

5 61951-1—2004

6 (IEC)

29 2015 . No 162- « 26
(1)
»,
« ».
() « ».
».

(www.gost.nj)

© . 2019

1	1
2	1
3	1
4	2
5	3
5.1	3
5.1.1	3
5.1.2	4
5.1.3	4
5.2	5
5.3	5
5.3.1	5
5.3.2	5
5.3.3	5
5.3.4	5
6	5
6.1	5
6.1.1	5
6.1.2	6
6.1.3	6
6.2	8
7	9
7.1	9
7.2	9
7.2.1	9
7.2.2	9
7.3	9
7.3.1	9
7.3.2	20	10
7.3.3	18'	11
7.3.4	(R).....	12
7.4	().....	12
7.5	12
7.5.1	12
7.5.2	15
7.6	18
7.7	18
7.7.1	18

61951-1—2019

7.7.2	L . X	19
7.7.3	LT/LU. MT/MU HT/HU	19
7.7.4	J	19
7.7.5	JT	19
7.7.6	R	20
7.8		20
7.9	,	20
7.10	55 "	
LT.		21
7.11	JT	21
7.12		22
7.12.1		22
7.12.2	()	22
7.12.3	(DC)	22
8		23
9		23
10		23
10.1		23
10.2		23
10.2.1		23
10.2.2		24
10.2.3		25
10.3		26
()		27
		28

1

Secondary cells and batteries containing alkaline or other non-acid electrolytes.
Secondary sealed cells and batteries for portable applications. Part 1. Nickel-cadmium

— 2020—05—01

1

2

8

— { }.
IEC 60050-462:2004, International Electrotechnical Vocabulary (IEV) — Part 462: Primary and secondary cells and batteries (462.

IEC 60086-1. Primary batteries — Part 1: General (1.)

IEC 60086-2. Primary batteries — Part 2: Physical and electrical specifications (.

2.)

IEC 61959. Secondary cells and batteries containing alkaline or other non-acid electrolytes — Mechanical tests for sealed portable secondary cells and batteries (, -

)

IEC 62133-1. Secondary cells and batteries containing alkaline or other non-acid electrolytes — Safety requirements for portable sealed secondary cells and for batteries made from them, for use in portable applications — Part 1: Nickel systems (, -

1.)

3

8

60050-482. -

1

61951-1—2019

:
 - : <http://www.electropedia.org/>
 - : [hnp77www.iso.org/obp](http://www.iso.org/obp/hnp77www.iso.org/obp).
 3.1 (nominal voltage):
 1,2
 1
 2
 [60050-482:2004.482-03-31. — 1 2]
 3.2 (rated capacity):
 1 — 5 • (-),
 7.3.2. 5- 8
 2 5- • (-),
 5- 7.3.2.
 [60050-482:2004.482-03-15. — 1 2]
 3.3 (small prismatic cell):
 25
 3.4 (cylindrical cell):
 3.5 (button cell):
 3.6 (nickel-cadmium cell):
 3.7 (nickel-cadmium battery):
 3.8 (sealed cell):
 1
 2
 [60050-482:2004.482-05-17. — 1 2]
 3.9 (portable cell):
 3.10 (battery for portable applications):
4
 a) $\pm 1\%$ — :
 b) $\pm 1\%$ — :

- c) $\pm 1\%$ — ;
- d) $\pm 2^\circ\text{C}$ — ;
- e) $\pm 0.1\%$ — ;
- ± 0.1 — ;
-) $\pm 5\%$ — .

5

5.1

5.1.1

5.1.1.1

- (L):
- ();
- (J);
- ();
- (X).

1

- L — 0.5/;
 - — 3.5/;
 - J — 5.0/;
 - — 7.0/;
 - X — 15/.
- 2 :/() = „{ •)/1. (. 61434).

- , 40' , L. . J. X .
- , 50* . L. . J. X U.

1.0/ L. , J. X R.

5.1.1.2

KF L. . J. X.

- a) () ;
- b) () ;
- c) () ;

— KFL 18/07/49

18 .

7

49 .

5.1.1.3

- L. , J. X,
-
-) () ;

KR

61951-1—2019

) () , , -
 , , , -
 2. , , -
 1 KRL 33/62 33 61,5 .
 2 KRLT 33/62 33 61,5 .
 3 KRHR 23/43 33 61,5 .
 23 43 . 1,0I_f .
 L. R. : , , -
 - 20 — D;
 - 14 — ;
 - 6 — ;
 - 03 — .
 — KRMR03 - , , -
 5.1.2 - , -
 L. , : (L);
 • ();
 - ().
 :
 a) () , , -
 b) () , , -
 — KBL 116/055 - 11,6 5,5 .
 5.1.3 - :
 /1 — N2.
 N1 — :
 N2 — , N2 1. -
 , : -
 — 2KFL 18/07/49 , -
 18 . 7 49 ; -
 - , .
 — 3KRL 33/62 , -
 61,5 ; 33

—	<i>KRMR03-3</i>			-
•	—	<i>116/055-3</i>	<i>11,6</i>	<i>5,5</i>

5.2

5.3

5.3.1

• «		»	«Ni-Cd»;	-
-		;		
•	(«+»	«-»);		
-	();	
-			;	

1

2

5.3.2

-		5.1;		-
•	(«*»	«-»);		
-	();	

5.3.3

- «		»	«Ni-Cd»;	-
-		;		
-		;		
-	().	

5.3.4

5.3.1—5.3.3.



6

6.1


6.1.1

1 2.

61951-1—2019

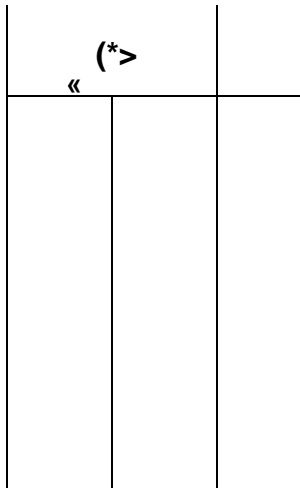

1 —

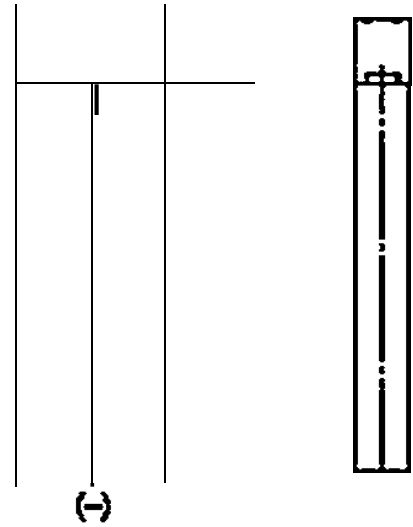

2 —

6.1.2

1.

1 —

	17.3 -	6.1	402 1 0
	17.3	6.1	46.2 -to
	17.3	8.3 > 0	48.2
	17.3 10	6.1	67.3
	17.3 -1.0	8.3 J	67.3 0
	17.3	10.5	67.3 -1.5
	17.3	17.3 0	67.3
	23,0	14.7 J	67.3

6.1.3

6.1.3.1


(. 3),

2.

2 —

«	6	*	-											
				£	F		G			0				
KR03		R03 LR03	1.2	44.5	(43.3)	4.3	—	0.5	3.8	(2.0)	0.8	10.5	9.5	0.4
KR6		R6 LR6		50.5	(49.2)	7.0	—	0.5	5.5	(4.2)	1.0	14.5	13.5	0.5
KR14		R14 LR14		50,0	(48.6)	13.0	—	0.9	7.5	(5.5)	1.5	26.2	24.9	1.0
KR20		R20 LR20		61.5	(59.5)	18.0	—	1.0	9.5	(7.8)	1.5	34.2	32.3	1.0

60086-1.	(R)	(LR)	КахААА(R03): АА(R6>; (R 14): D(R20).
60086-2.	D		

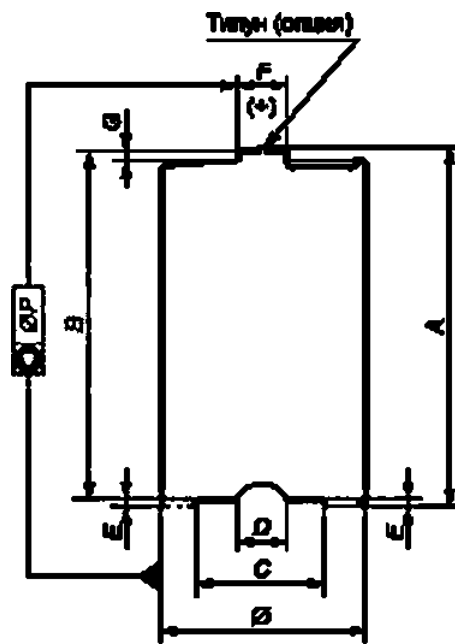

.8—

; F—

; 0—

: 6—
; 0—

3—

6.1.3.2

3.

7


61951-1—2019

3 —

			Высота, мм	
KR8/43	7.8		42.5	
KR 11/16	10.5		16,0	
KR 11/45	10.5		44.5	
KR 12/30	12.0		30,0	
KR 15/18	14.5		17.5	
KR 15/29	14.5		28,7	
KR 15/30	14.5		30,0	
KR 15/43	14.5		43.0	
KR 15/48	14.5	0	48.0	
KR 15/49	14.5	-07	49.0	
KR 15/51	14.5		50.5	
KR 15/65	14.5		65.0	} 0
KR 17/18	17,0		17.5	
KR 17/29	17,0		28.5	
KR 17/43	17,0		43,0	
KR 17/50	17,0		50.0	
KR 17/66	17,0		66.0	
KR 17/67	17,0		67.0	
KR 23/27	23,0		26.5	
KR 23/34	23,0			
KR 23/43	23,0			
KR 23/50	23,0			
KR 26/31	25.8			
KR 26/50	25.8	-0		
KR 33/36	32,1	-1.0	36.3	} 0
KR 33/44	33,0		44,0	
KR 33/60	33,0		60.0	
KR 33/62	33,0		61.5	
KR 33/91	33,0		91,0	
KR 44/71	43.5		71.0	
KR 44/91	43.5		91.0	} 0
KR 44/146	43.5	J -2.5	146.0	

* KR L, J, X, U / R (.5.1.1.3).

6.2

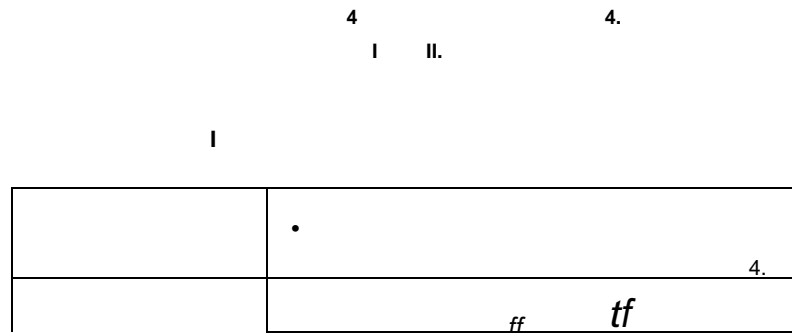

4 —

8

4

4 —

№	%		№	%
	1.	(.5.1 2).		
116/055**	11.6		5.5	
156/048	15.6		4.8	
156/061	15.6		6.1	
222/050	22.2	0	5.0	
229/055	22.9	-0.3	5.5	*
232/030	23.2		3.0	0
232/055	23.2		5.5	-0.6
232/067	23.2		6.7	
252/064	25.2		6.4	
252/077	25.2		7.7	0
252/095	25.2		9.5	> -1.0
346/055	34.6	0	5.5	> 0
346/098	34.6	-0.4	9.8	-0.6
432/081	43.2		8.1	0
505/105	50.5		10.5	J -1.0
R 44.				

7

7.1

5

$I_s, I_s()_5(\bullet)/1$

7.2

7.2.1

0.2/

1.0

(20 ± 5) *

(65 ± 20) %.

0,1/

16

(20 ± 5)'

7.2.2

(20 ± S)'

0.2/

1.0

(20 ± 5) *

(65±20) %.

7.3

7.3.1

7.3.2—7.3.4.

61951-1—2019

7.3.2
7.3.2.1

20 *

7.2.
(20 ± 5) * 1 -

4 .
7.3.2.2

20 '

(20 ± 5) °C -

5 6.

5 6.

5 —
20 '

		UVTA.U	M'MT.'MU/J/JT	H/HT/HU	X
0J, ⁸	1.0	5	5	5	5
1.0/,	0.9	—	42	48	54
5.0/,	0.8	—	—	6	9
10.0/,	0.7	—	—	—	3
⁸ . , - . (2015) * 0.1/,. 7.3.2. 7.2 0.2/,. -					

6 —

20 *

		L		
0.2/, ⁸	1.0	5	5	5
1.0/,	1.0	—	48	51
5.0/,	0.8	—	—	6
⁸ , - . (20 ± 5) * 0.1/,. 7.3.2. 7.2 0.2/,. -				

7.3.2.3

20 '

(20 ± 5) '

0.2/,. .

7.

1.0 .

0.2/,. .

7 —

20 *

0.21, ⁹	1	5
⁸ . , -		

7.3.2.4 () ()

8 8

(32) 2000 - .

8 — (-) ()

	1	2	3	4	5	.
1	1920	1950	1900	2005		2005
2	2000					2000
3	1920	1950	2000			2000
4	1860	1890	1900	1950	2000	2000
5	2005					2005
6—31*»						
32	1970	2010				2010
						2000
*» (-) 6—31 32						

7.3.3

18 °C

7.2.

(18 ± 2)' 16 24 .

(18 ± 2)'

9.10 11.

9.10 11.

9 —

18 *

0.2/,	1.0	
1.	0.9	15

10 —

18 '

.	.	IAT/LU	MT/WU	J	/	X
0.2/,	1.0	2	2		2	4
1.0/,	0.9	—	15	10	15	30
2.0/,	0.8	—	—	—	—	9
3.0/,*	0.8	—	—	—	—	—
(2015) * 0.1 /, . 7.2 0.2 /, . 7.3.2.						

61951-1—2019

11 —

18 *

		L		
02/,	1.0	—	2 45	
1.0/,	0.9	—	12	30
2.0/, ⁸	0.8	—	—	9
<p>8</p> <p>0.1/ . 7.2 0.2/, .</p> <p>(20 ± 5) * 7.3.2.</p>				

7.3.4 (R)

R 1.0/, 1.2 -

0.1/, 2 (20 ± 5) -

7.3.2 7.3.3.

(20 ± 5) * 10 (18 ± 2) ' 5

7.4 ()

()

7.2 28 -

(20 ± 2) . -

±5 °C.

28 7.3.2 0.2/, :

- 3 — ;

- 3 15 — ;

- 3 15 — ;

- 3 45 — L .

7.5

7.5.1

7.5.1.1

0.2/, 1,0 8. (20 ± 5)

12.14—17. 35

7.5.1.2

12 —

1	0.10/,	16		0,25/ 2 20 3
2—48	0.25/,	3 10		0.25/, 2 20 3
49	0.25/	3 10		0.25/ 1
50	0.10/,	16	1—4	0.10/, 1
1.0 .				
51- .				
50- .				
100.150. 200. 250. 300. 350. 400 450- .				

1—50 ,

50- , 3 . -

50- . -

3 . , -

:

- 400 — ;

- 500 — L/LR, M/MR, J/JR, H/HR X/XR;

• 50 — LT/LU, MT/MU. JT HT/HU.

7.5.1.3 , -

13. , -

13 — -

1—49	0.5/,	3	20—30	0.5/, 1,0
50	0.10/,	16	1—4	0 J/, 1.0
3 . 5 10 . 132 , ,				
51- ,				
50- .				
100 150- .				

1—50 1.0

50> , 3 .

50- . -

3 . , -

200 D. , -

7.5.1.4 ()

7.5.1.4.1 7.5.1.2 -

7.5.1.4.2 X -

61951-1—2019

14 —

X

1	0.1/,	16	30	1.0/,	1.0	30—90
2—48	0.3/, 8	4 ³	30	1.0/,	1.0	30—90
49	0.3/, 8	4 [®]	24	1.0/,	1.0	30—90
50	0.1 /,	16	1—4	0.2/,	1.0	
<p>51- , , .</p> <p>50- .</p> <p>100. 150. 200. 250. 300. 350. 400 450- .</p>						

1 —50 , 1.0
 , 49- . 30 1.0
 , 50- . 3 .
 , 50- , . 3 .
 , 500.
 7.5.1.4.3 X

15 —

X

1	0.1/, 8	16	30	5.0/,	0.8	30—90
2—48	1.0/,	1	30	5.0/,	0.8	30—90
49	1.0/,	1	24	5.0/,	0.8	30—90
50	0.1/,	16	1—4	0.2/,	1.0	
<p>51- , , .</p> <p>50- .</p> <p>100. 150. 200. 250. 300. 350. 400 450- .</p>						

1 —50 , 0.8 8
 , 49- . 5 1.0
 , 50- . 3 .
 , 50- , , 3 .
 , 500.
 7.5.1.4.4 HR XR

16 —

HR XR

1—48	1.0/,	3	20—30	1.0/,	1.0	10—30
49	1.0/,	,	24	1.0/,	1.0	10—30
50	1.0/,	® 0.1/,	1—4	0.2/,	1.0	
<p>2</p> <p>-AV 77 /.</p> <p>51- , , .</p> <p>50- .</p> <p>100. 150. 200. 250. 300. 350. 400 450- .</p>						

61951-1—2019

1—50 1.0
 , 49- 30 1.0
 , 50- 3 -
 , 50- 3 .
 , 500.

7.5.1.5

17 —

1	0.1	16	5	0.2/(3
2—48	0.1/j	8	1	0.2! 3
49	0.1/,	8	1	0.2/, 1.0
50	0.1/,	16	1	0.2/, 1,0
100.150.200. 250. 300 350- 49- 50- .				

1—50 ,
 50- . 3 .
 , 50- .
 , 3 .
 400 300 L.

7.5.2

7.5.2.1

7.5.2.2

L. . J. X L.

0.2/, -

1.0 .

(20 ± 5) ' .

18

19

16 —

L. . J. X

				*
1	0.05 8	91	0.2/(1,0
2	0,05/j	91	0.2/(1.0
3	0.05/	91	0.2/	1.0
4	0.05/, 8	91	0.2/(1.0

25 .

3 .

61951-1—2019

19 —

	L				9
1	0.0	91	0.05/, 8	91	0.2/ (1.0
2	0.0	91	0.05/, 8	91	0.2/, 1.0
3	0.017)	91	0.05/ (91	0.2/j) 1.0
4	0.017)	91	0,057) 8	91	0.2/) 1.0

30 ' .

3 .

7.5.2.3

LT.

20.

;

40 ' ;

6

70 ' ;

—

8

6

70 °C

40 ' .

1.0

(20 ± 5) "

0,2/,

16

24

(40 ± 2) °C.

20.

(40 ± 2) * (70 ± 2)

40

16

24

(70 ± 2) " .

75 *

6

70 ' .

70 "

16

24

(40 ± 2) °C.

40 °C

20.

20.

20 —

LT,

	*			4	
1	40 *2	0.051) 8	48	: 0.2/, 1,0 : 1.0/)	1,0
2		0.051) 8	24	: 0.2/) : 1.0/,	1,0 1.0

16

3	4012	0.05/, 8 24	0.2/, 1.0 8 : 1.0/, 1.0	3 45 42	
4	7012	0.05/, 8 60	0.2/, 1.0 : 1.0/, 1.0		
5		0.05/, 60	0.2/, 1.0 : 1.0/, 1.06		
6		0.05/, 8 60	0.2/, 1.0 : 1.0/, 1.0		
7	4012	0.05/, 8 48	0.2/, 1.0 : 1.0/, 1.0		
8		0.05/, 8 24	0.2/, 1.0 : 1.0/, 1.0		2 30 24
9		0.05/, 24	0.2/, 1.0 : 1.0/, 1.0		2 30 24

*

LT.

7.5.2.4

JT

0.2/, -
 (20 ± 5) 1.0 .
 (55 ± 2)* 16 24 .
 26 0,033/, -
 (55 ± 2)* 1.1 . -
 1.0/, .
 30 . -

7.5.2.5

LU. MU HU

21.

50 ;
 12 70* :
 12 70* -
 50' .
 0.2/, -
 (20 ± 5) 1.0 .
 (50 ± 2)* 16 24 .
 (50 ± 2)* (70 ± 2) X 21.
 50 ' . -
 16 24 (70 ± 2)* .

61951-1—2019

12 70 " . 75 *
 24 (50 ± 2) * . 50 °C 70 * 16 21. 21. —

21 —		LU. MU		HU
1	5012	0.05/, 48	: 0.2/, 1.0 : 1.0/, 1.0	
2		0.05/, 24	; 0.2/, 1.0 : 1.0/, 1.0	3 45 42
3		0.05/, 24	. 0.2/, 1.0 : 1.0/, 1.0	3 45 42
4	7012	0.05/, 120	: 0.2/, 1.0 ; 1.0/, 1.0	
5		0.05/, 8 120	; 0.2/, 1.0 : 1.0/, 1.0	
6		0.05/, 120	A: 0.2/, 1.0 : 1.0/, 1.0	
7	5012	0.05/, 48	: 0.2/, 1.0 : 1.0/, 1.0	
8		0.05/, 24	: 0.2/, 1.0 : 1.0/, 1.0	2 30 24
9		0.05/, 24	. 0.2/, 1.0 : 1.0/, 1.0	2 30 24

8

LT.

7.6

7.7

7.7.1

(20 ± 5) " 1,0 8. 0.2/,
 0.1/, 48
 (20 ± 5) . 1
 4 (2015) ' . 0.2/, 1
 (20 ± 5) * .
 18

7.7.2 5 . L, , X -
 -
 . 0.2/, -
 (20 ± 5) °C 1.0 . 0.1/, 28 -
 (20 ± 5) °C. 1 -
 4 0.2/, 1
 (20±5)⁹ . :
 -5 — ;
 • 4 15 — .
 7.7.3 LT/LU, MT/MU HT/HU -
 (0 ± 2)⁹ . 0.2/, -
 (20 ± 5)⁹ 1.0 16
 24 . 22.
 22 — 0 *

	4		*	
	LT/LU, MT/MU, HT/HU		MT; MU, HT/HU	
0.05/, 28	0.2/,	1.0	1.0/,	1.0
*				

- 4 15 ;
 - 36 .
 7.7.4 J -
 (5 ± 2)⁹ . 0.2/, -
 (20 ± 5)⁹ 1.0 -
 (5 ± 2) °C 16 24 . 0.1/, 48 -
 (20 ± 5)⁹ . 1
 4 (20 ± 5)⁹ . 0.2/, 1 8
 (20±5)⁹ .
 7.7.5 JT -
 (5 ± 2)⁹ . 0.2/, -
 (20 ± 5)⁹ 1.0 -
 (5 ± 2) * 16 24 . 0.05/, 96 -
 (20 ± 5)⁹ . 16
 24 (2015)⁹ .
 19

61951-1—2019

			1.0/,	1.1	
(20 ± 5) ' .			37		
7.7.6		R			-
				0.2/,	-
(20 ± 5) ' .		1.0 .	1.2/,	1.2	-
0.1 /,	(20 ± 5) ' . 28 .			1	4 -
(20 ± 5) * .					
(20 ± 5) ' .		0.2/,		1.0	
7.8		5 .			-
60		(20 ± 5) °C. 1.0/,		0.2/,	
7.9					
(20 ± 5) ' .	1.0 8;		0.2/,		
(20 ± 5) °C			0.2/,		
1.0 .					
(2015) *	(65 ± 20) %				
(20 ± 10) * .					
- 7.2 —					
. L/LT/LU, M/MT/MU. J/JT. H/HT/HU. X					
- 7.3.4 —		R.			
0,2/,	1.0 :			(20 ± 5) "	
20					

(20 ± 5) °C
1.0 8.

0.2/

23.

23 —

(20 ± 5) °C	
7S2	5
2 < 7S6	4 30
6 < 7S 12	4
12 < 7S 18	3 30

7.10

55 °C

LT.

LT.

1.0

(20 ± 5) °C
(55 ± 2) °C

0.2/_t
16

24 .

(55 ± 2) °C

24.

24 —

55 *

1	0.05/	48	: 0.2/	1.0
2	0.05/ 8	24	: 1.0/	1.0
	0.05/	24	; 0.2/	1.0
			: 1.0/ _t	1,0
			: 0.2/	1.0
			: 1.0/	1,0
LT.				
2 3				

7.11

JT

(20 ± 5) °C
25

16

1.0

24 .

0.2/

25.

61951-1—2019

25.

25 —

JT

{						
•)						
(45)	45 ±2	0,033/ 8	48	1.0/	1.1	37
(5)	5±2	0.033/ 8	48	1.0/	1.1	37
(45)	45 ±2	0.04/	24	1.0/	1.1	25
(5)	5±2	0.04/	24	1.0/	1.1	25

7.12

7.12.1

(), (DC)

()

0.2/

1 .

7.1.

1 . 4 (20 ± 5) ' .

(20 ± 5) ' .

7.12.2

()

1—5

(RMS)

(RMS) /

(1.0 ±0.1) .

R_{ae} .

U_a —

i_a —

1

2

3

20 .

7.12.3

(DC)

I_1 ,

26.

10

U_y ,

I_2

26

U_2

3 .

R_{dc}

I_1, I_2 —
 U_1, U_2 —

26 —

	KF. KR ⁴	KRM ⁴ KRJ ⁴ . KRH ⁴	KRX
	0.2/	0.5/	1.0/
	2.0/	5.0/	10.0/

*

R.

8

61959.

9

62133-1.

10

10.1

10.2

10.2.1

27.

: . . . D. F

— 41.

27.

27.

61951-1—2019

27 —

	41	5.3 6.1 7.3.2 7.3.2	20 ' 0.2/, 20 * : 1.0/, (. J.) 5.0/, ()" 10.0/, (X)	0	
	5	7.3.3 7.3.3	-18 * 0.2/, -18 " 1.0/,	1	
	5	7.7 7.8		0	
D	5	7.5.1		1	
	5	7.4	()	1	
F	20	7.9 7.3.2	2.6.12.18 20 * 0.2/,	1	

, U R.

10.2.2

, 28 29.
: . . . D. . F G
— 46.
28 29.
28 29.

28 —

	46	5.3 6.1 7.3.2 7.3.2	20 * 0.2/, 20 : 1.0/, (. J.) 5.0/, (10.0/, (X)	0	3
	5	7.3.3 7.3.3	-18 ' 0.2/, -18 * : 1.0/, 2.0/, 3.0/,	1	

28

		*			
	5	7.7 7.8		0	3
D	5	7.5.1		1	
	5	7.5.2 7.8		1 0	
F	5	7.4	()	1	
G	20	7.9 7.3.2	20* 2.6.12.18 0.2/	1	

* . U R.

29 —

		,			
	46	5.3 6.2 7.3.2 7.3.2	20* 02/ 20' 1.0/,() 5.0/,()	0	3
	5	7.3.3	-18* 0.2/,() 1.0/,() 2.0/,()	1	
	5	7.7 7.8		0	
	5	7.5.1		1	
	5	7.5.2		1	
F	5	7.4	()	1	
G	20	7.9 7.3.2	20* 2.6.12.18 0J/	1	

10.2.3

30.

— 21.

30.

30.

61951-1—2019

30 —

	21	5.3 7.3.2	20 * 0.2/,	0	1
	20	7.9 7.3.2	20 ' 2.6.12.18 0.2/,	1	

10.3

604104

AQL.

31.

31 —

				AOL. %
		- ; • ; • ; • ; • ;		II 4 II 4 S3 1 II 0.65
	6 - 5.3	• ; • ; -		S3 1 S3 1 S3 1
	7.3.2 7.3.2	- ; • 20 ' 0,2/ ; - 20 * ; 1.0/ (. . MU MR) 5.0/ (, . HU HR) 10.0/ (X)		II 0.65 S3 1 S3 1 S3 1 S3 1

AQL.

()

! 60050482:2004	—	
IEC 60086-1		60086-1—2019 « . 1. »
IEC 60086-2		60086-2—2019 « . 2. - »
IEC 61959		61959—2007 « . - - »
IEC 62133-1		62133-1—2019 « . 1. - - - »
* — :		-
- —		.

61951-1—2019

IEC 60051 (all parts)	Direct acting indicating analogue electrical measuring instruments and their accessories ()
IEC 60086 (all parts)	Primary batteries ()
IEC 60410	Sampling plans and procedures for inspection by attributes ^{1*} ()
IEC 60485	Digital electronic d.c. voltmeters and d. c. electronic analogue-to-digital converters ^{1*} (d. . d. . -)
IEC 61434	Secondary cells and batteries containing alkaline or other -acid electrolytes — Guide to the designation of current in alkaline secondary cell and battery standards ()

)

621.352.1:006.354

29.220.10

2 27.20.1

: , , - . , ,

10—2019/90

. .
.
.
.

09.10.2019.

29.10.2019.

60»84' .

. . . 3.72. . . . 3.45.

« ! »

. 117418 .

- , . 31. . 2.

www.gostinfo.ru info@gostinfo.ru