



60254.2  
2009

-

2

IEC 60254-2:2008  
Lead-acid traction batteries — Part 2: Dimensions of cells and terminals  
and marking of polarity on cells  
(IDT)



2011

60254-2—2009

- 27 2002 . N9164- « — 1.0—2004 « », » .
- 1 « - « » ( 4 « ») ,
- 2 044 « »
- 3 15 2009 . 941-
- 4 60254-2:2006 « - 2: » (IEC 60254-2:2008 «Lead-acid traction batteries — Part 2: Dimensions of cells and terminals and marking of polarity on cells»).
- 5 « », « » . « » . — ,

© , 2011

1	.....	1
2	.....	1
3	.....	1
3.1	.....	1
3.2	.....	1
3.3	, .....	2
3.4	, .....	2
4	.....	.3
4.1	.....	3
4.2	.....	3
4.3	.....	3
5	.....	3
5.1	.....	3
5.2	.....	3
5.3	.....	4
	(        ) .....	5
	.....	6

Lead-acid traction batteries. Part 2. Dimensions of cells and terminals and marking of polarity on cells

— 2011—01—01

1

- ( ) :
- :
- :
- ;
- , .

2

60417—2002  
*Graphical symbols for use on equipment).*

;  
 {IEC 60417:2002

3

3.1

- ( ):
- L ( ) .

3.2

3.2.1 ( )

- b*— ( , ) ;
- h*— ( , ) ;
- l*— ( , ) .

3.2.2

1.

60254-2—2009

1 —

			...	$t_{max}$
	160		300	47.64. 79
			370	95. 111
			440	127. 145
			510	160. 176
			SS5	192.208
			7 SO	
L	198		370	47.65
			440	83. 101
			510	119. 137
			555	155.174
			605	192
			750	

3.3

2.

2 —

	•		*													
8	360	323	160			90	94	109	128	144	161			206		
	390	353	160			90	94	109	128	144	161		190	206		244
D	435	398	160	60		90	94	109	128	144	181	177	190			244
	450	413	160							144	161	177		206		
F	530	493	160	60	75	90		109	128	144		177	190		225	
1	560	523	160	60	75	90		109	128	144	161		190	206	225	244
	740	703	160	60	75	90	94	109	128	144						

3.4

3.

3 —

( )

5	2.00x6.19	50.6x157.2	—	—
7	2.75x6.19	69.9 157.2	—	—
9	3.50x6.19	68.9x157.2	3.50 .63	88.9 219.2
11	4.25x6.19	108.0x157.2	4.25 .63	108.0 219.2

2

3

13	5.00 .19	127.0 x157.2	5.00 8.63	127.0x219.2
15	5.75 .25	146.1 158.6	5.75 8.63	146.1 219.2
17	6.50 .25	165.1 158.8	6.50x8.63	165.1 219.2
19	7.25 .25	184.2 X1S8.8	7.25x8.63	164.2x219.2
21	8.00 .25	203.2 x158.8	8.00x8.63	203.2x219.2
23	8.75 .25	222.3 x1S8.8	—	—
25	9.50 .25	241.3 x158.6	—	—
27	10.25x6.25	260.4 xisa.e	—	—
29	11.00x6.25	279.4 x158.6	—	—
31	11.7Sx6.25	298.5 x1S8.6	—	—
33	12.50 .25	317.5x158.6	—	—

4

4.1

4.2

«+».

«-»

4.3

60417.

60417\*5005 (2002\*10):

60417\*5006

(2002\*10):

5

— —5

6

5


5.1

5.2

4

1.

60254-2—2009

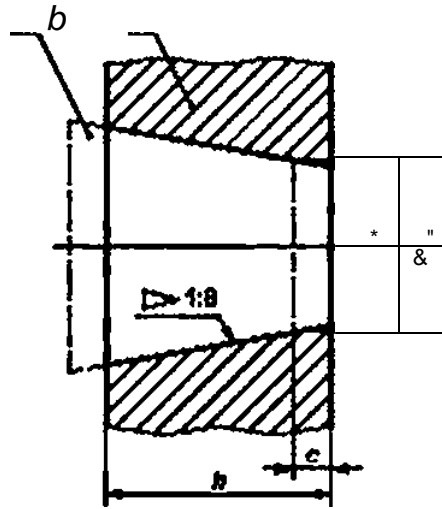

— : b — ( 1

4 —

	2		h		
	50	12.5	25.0	13.0	4.0
	70	14.0	25.0	14.5	4.0
	95	15.0	36.0	16.0	8.0

5.3

2.

5.

60095-2.

1 —

2 —



Рисунок 2

S —

			2
0	10	11	35
	10	11	50
	10	11	70
	10	11	95

4

( )

.1

60417—2002	MOD	26312—89 ( 417—73) -
<p>• MOD — : — .</p>		



60254-2—2009

60095-2:1984

-

.

2

-

60254\*2—2009

621.356:006.354

29.220.20

34 8110

:

,

,

,

,

21.02.2011.

21.03.2011.

60 » 8 4

. . . . . 1,40. . - . . . 0.75. 66 . . . 173.

« . . . . . » . 123965 . . . . . 4.

www.90sinfo.ru info@90sinfo

« . . . . . » . . . . .  
« . . . . . » — . . . . . » . >05062 . . . . .